

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

REQUEST FOR FILING APPLICATION

Under Rule 53(a), (b) & (f)

(No Filing Fee or Oath/Declaration)

(Do NOT use for Provisional or PCT Applications)

Use for Design or Utility Applications

PATENT
APPLICATION

RULE 53(f) NO DECLARATION

Assistant Commissioner of Patents
and Trademarks
Washington, DC 20231

Atty. Dkt.

PM 263282
M#None
Client Ref

Date: September 22, 1999

1. This is a Request for filing a new Patent Application (☐ Design ☒ Utility) entitled:

2. (Complete) Title: METHOD AND MACHINE FOR PREPARING AND DISPENSING DOCUMENT

without a filing fee or Oath/Declaration but for which is enclosed the following:

3. ☒ Abstract _____ page(s).4. 35 Pages of Specification (only spec. and claims); 5. ☐ Specification in non-English language

6. 39 Numbered claim(s); and

7. ☒ 7 sheet(s) per set; ☒ 1 set informal; 8. ☐ formal of size: ☐ A4 ☐ 11"

Drawings:

9. DOMESTIC/INTERNATIONAL priority is claimed under 35 USC 119(e)/120/365(c) based on the following provisional, nonprovisional and/or PCT international application(s):

Application No.	Filing Date	Application No.	Filing Date
(1)		(2)	
(3)		(4)	
(5)		(6)	

10. FOREIGN priority is claimed under 35 USC 119(a)-(d)/365(b) based on filing in _____

Application No.	Filing Date	Application No.	Filing Date
(1)		(2)	
(3)		(4)	
(5)		(6)	

11. _____ (No.) Certified copy (copies): ☐ attached; ☐ previously filed (date) _____
in U.S. Application No. _____ / _____ filed on _____12. ☐ This is a reissue of Patent No. _____13. ☐ See top first page re prior Provisional, National, International application(s) (X box only if info is there and do not complete corresponding item 14 or 15.)14. ☐ Amend the specification by inserting before the first line -- This is a ☐ Continuation-in-Part
☐ Divisional ☐ Continuation ☐ Substitute Application (MPEP 201.09) of:14(a) ☐ National Appln. No. _____ / _____ filed _____ -- (M# _____)14(b) ☐ International Appln. No. PCT/ _____ filed _____15. ☐ Amend the specification by inserting before the first line: --This application
claims the benefit of U.S. Provisional Application No. 60/ _____, filed _____ --16. Extension to date: ☐ concurrently filed ☐ not needed ☐ previously filed

17. ☐ Prior application is assigned to

by Assignment recorded _____ Reel _____ Frame _____

18. ☐ Attached:

19. This application is made by the following named inventor(s)

(Double check instructions for accuracy.):

(1) Inventor	John	M.	NICKERSON
	First	Middle Initial	Family Name
Residence			
	City	State/Foreign Country	Country of Citizenship
Post Office Address			
(include Zip Code)			

(2) Inventor	Bradley	W.	HAUSER
	First	Middle Initial	Family Name
Residence			
	City	State/Foreign Country	Country of Citizenship
Post Office Address			
(include Zip Code)			

(3) Inventor			
	First	Middle Initial	Family Name
Residence			
	City	State/Foreign Country	Country of Citizenship
Post Office Address			
(include Zip Code)			

(4) Inventor			
	First	Middle Initial	Family Name
Residence			
	City	State/Foreign Country	Country of Citizenship
Post Office Address			
(include Zip Code)			

(5) Inventor			
	First	Middle Initial	Family Name
Residence			
	City	State/Foreign Country	Country of Citizenship
Post Office Address			
(include Zip Code)			

20. NOTE: FOR ADDITIONAL INVENTORS, check box ☐ and attach sheet with same information regarding additional inventors.


Pillsbury Madison & Sutro LLP
Intellectual Property Group

1100 New York Avenue, N.W.
Ninth Floor, East Tower
Washington, D.C. 20005-3918
Tel: (202) 861-3000
Atty/Sec: JMF/jrh

By: Atty: Jay M. Finkelstein

Reg. No. 21082

Sig:



Fax: (202) 822-0944
Tel: (202) 861-3623

NOTE: File in duplicate with 2 post card receipts (PAT-103) & attachments

APPLICATION UNDER UNITED STATES PATENT LAWS

Invention: METHOD AND MACHINE FOR PREPARING AND DISPENSING
DOCUMENTS
Inventor(s): John M. NICKERSON
Bradley W. HAUSER

Pillsbury Madison & Sutro LLP
Intellectual Property Group
1100 New York Avenue, N.W.
Ninth Floor, East Tower
Washington, D.C. 20005-3918
Attorneys
Telephone: (202) 861-3000

This is a:

- ☐ Provisional Application
- ☒ Regular Utility Application
- ☐ Continuing Application
- ☐ PCT National Phase Application
- ☐ Design Application
- ☐ Reissue Application
- ☐ Plant Application
- ☐ Substitute Specification
Sub. Spec. filed _____
in App. No. _____ / _____
- ☐ Marked Up Specification re.
Sub. Spec. filed _____
in App. No. _____ / _____

SPECIFICATION

METHOD AND MACHINE FOR PREPARING AND DISPENSING DOCUMENTS

BACKGROUND OF THE INVENTION

5

The present invention relates to machines for preparing and dispensing documents relating to financial transactions, such as money orders. A variety of machines of this type have already been proposed or are in use.

10 These machines possess a number of inherent limitations. Among these limitations are the inability to be efficiently supervised and controlled from a location remote from the machine, the inability of such machine to except various forms of payment, limitations relating to the nature and form of the data, text and graphics that can be printed, and the limited ability of these machines to monitor their own operation.

15 In addition, the machines that have already been proposed or are in use are capable of preparing only a single type of document and cannot be adapted to the preparation of other types of documents.

BRIEF SUMMARY OF THE INVENTION

20

A primary object of the present invention is to open the possibility of preparing and dispensing documents, and in particular documents having monetary value, from any desired point-of-sale location, with a high degree of security.

25 Another object of the invention is to provide flexibility in the types of documents that can be dispensed from a single machine.

A further object of the invention is to improve communications between a machine in which such documents are prepared and dispensed and a central location remote from the machine, and in particular to allow
30 transmission, from the machine to the central location, of information relating to documents that have been dispensed, and from the central location to the machine of authorization instructions to continue preparing and dispensing such documents.

Still another object of the invention is to allow such a machine to be configured to produce various types of documents.

Still another object of the invention is to allow the purchase of such documents to be electronically debited to, for example, credit or debit
5 accounts by the use of credit, debit, or "smart" cards.

The above another object are achieved, according to the present invention, by the provision of a machine for preparing and dispensing documents relating to financial transactions, the machine being composed of :

a manually operable input unit for input of data and operating
10 commands;
a document printer unit for printing readable information on document forms based on data inputted at the input unit, the document printer unit comprising

a document form storage receptacle for holding the document
15 forms prior to being printed,

an ink jet printer for printing the readable information on the document forms to produce completed documents, and

a feed mechanism for feeding the document forms in
succession from the receptacle to the printer and for dispensing printed
20 documents from the machine after having been printed by the printer;
and

a control unit coupled to the input unit and the printer unit for
controlling operation of the printer unit in response to data and commands
inputted at the input unit.

25 Objects of the invention are further achieved by a method for preparing and dispensing documents relating to financial transactions, the method comprising:

inputting data and operating commands via a manually operable input
unit;

30 providing a plurality of document forms each printed with a bar code;
feeding a succession of document forms from a document storage receptacle to a document printer and printing readable information on each successive document form based on data inputted at the input unit;

reading the bar code on each document form with an optical reader
when the form is in the printer; and

dispensing each form, after printing, from the document printer.

Additional objects of the invention are achieved by a method for
5 preparing and dispensing documents relating to financial transactions, the
method comprising:

inputting data and operating commands via a manually operable input
unit;

feeding a succession of document forms from a document storage
10 receptacle to a document printer;

printing on each successive document form, in the printer with
magnetic ink, readable information based on data inputted at the input unit;
and

dispensing each form, after printing, from the document printer.

15 Other objects of the invention are achieved by a method for preparing
and dispensing documents relating to financial transactions, the method
comprising:

inputting data and operating commands via a manually operable input
unit;

20 reading data stored in machine readable form on a data storage
medium in a data reader forming part of the manually operable input unit;

feeding a succession of document forms from a document storage
receptacle to a document printer and printing readable information on each
successive document form based on data inputted at the input unit and data
25 read in the data reader; and

dispensing each form, after printing, from the document printer.

Still other objects of the invention are achieved by a method for
preparing and dispensing documents relating to financial transactions, the
method comprising:

30 inputting data and operating commands via a manually operable input
unit;

feeding a succession of document forms from a document storage
receptacle to a document printer and printing readable information on each

successive document form, the readable information assigning a monetary value to the document form based on data inputted at the input unit;

dispensing each form, after printing, from the document printer;

storing data representing the monetary value of each document and

- 5 data representing the cumulative monetary value of a succession of documents in a memory;

establishing communication between a remote location and a communication interface coupled to the memory, and transmitting the data stored in the memory to the remote location.

- 10 Still further objects of the invention are achieved by a method for preparing and dispensing documents relating to financial transactions, the method comprising:

inputting data and operating commands via a manually operable input unit;

- 15 feeding a succession of document forms from a document storage receptacle to a document printer and printing readable information on each successive document form based on data inputted at the input unit;

dispensing each form, after printing, from the document printer

establishing communication between a remote location and a

- 20 communication interface;

periodically transmitting authorization instructions from the remote location to the communication interface; and

blocking dispensing of printed documents when reception of an authorization instruction from the remote location has not occurred for a

- 25 predetermined period of time.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

Figures 1 and 2 are perspective views showing a preferred embodiment of a machine according to the present invention in two optional configurations.

5 Figure 3 is a perspective view showing the interior of the machine of Figures 1 and 2 with components removed to permit viewing of other components.

Figure 4 is a top perspective view showing printer unit components of a printer unit of the machine of Figures 1-3.

10 Figure 5 is a block diagram of the components of the machine of Figures 1-4.

Figure 6 is a pictorial view of a document prepared by a machine according to the invention.

15 Figure 7 is a flow chart illustrating the operation of a machine according to the invention.

DETAILED DESCRIPTION OF THE INVENTION

20 Figures 1 and 2 are perspective views showing two configurations of a preferred embodiment of a machine according to the present invention. The machine is composed essentially of three modules: a manually operable input unit, or data entry module, 2; a printer unit, or module; and a terminal control unit, or module. The printer and terminal control modules are both housed in a case 4.

25 Case 4 is preferably made of metal and is composed of a bottom plate, or base 6, two side panels 8 that are fixed to base 6, a rear panel (not visible in Figs 1 and 2, visible as element 34 in Figure 3) a rear door 10 hinged to the upper edge of the rear panel and a front door 12 having a lower edge that is hinged to the front edge of base 6. Door 12 is provided with a dispensing slot
30 14 for delivery of prepared documents.

Input unit 2 may be mounted on the upper surface of lid 12, as shown in Figure 1, or may be placed on a table or counter, alongside case 4, as shown in Figure 2. The base of input unit 2 is formed to allow unit 2 to rest on a counter or table top, as shown in Figure 2, and is also configured, in

cooperation with the upper surface of door 12, to be mounted securely, but removably, as with screws or bolts, on that upper surface.

For either mounting arrangement, input unit 2 is connected to the control unit by a suitable cable 18 connected at one end to a connector
5 mounted on the rear surface of unit 2 and at the other end to a connector on the back of case 4.

Door 10 can be opened to gain access to a document storage receptacle forming part of the printer unit and door 12 can be opened to gain access to a printer forming part of the printer unit, including access to the print head, as
10 well as to permit clearing of any paper jams that may occur between the printer and slot 14.

Preferably, case 4 is provided with a key operated lock 20 which locks at least door 10 in its closed position. The lock may also, optionally, be configured to lock door 12 in the closed position.

15 Input unit 2 consists essentially of an array of manually operable keys 24, a LCD display 26, preferably with LED backlighting, and, in preferred embodiments of the invention, a data reader 30 capable of reading data stored in smart cards or on magnetic stripes of debit or credit cards.

Preferably, display 26 contains a high contrast, high viewing angle
20 LCD display with a format of 2 lines of 20 alphanumeric characters each, including the capability of displaying three special currency characters.

Keys 24 may be constituted, for example, of a 5x5 matrix of full travel alphanumeric keys of the type provided on a push button telephone handset, in addition to a double width double zero key and operating command keys. The
25 operating command keys may include, for example, keys that perform the following functions:

Clear- clears the previous input that appears on the display; Escape- stops the present procedure and returns to the previous step; Credit Card- indicates that the transaction is being conducted with a credit card; Report-
30 prints a report; Debit Card- indicates that the transaction is being conducted with a debit card; Void- voids a money order or other transaction; Bill Pymt- indicates that a bill payment is being made; No Fee- indicates that no fee is being charged for the current transaction; Next- scrolls to the next option within the current activity; Print- prints the current document; Alpha- switches

the numeric keys to alphabetic keys; Enter- enters the operator input, if any, and scrolls to the next action; 00- inputs a double zero.

Unit 2 may be provided with an optional on/off keyswitch whose position will be sensed by the control unit to cause operation to enter an executive mode, which will be described in greater detail below.

Unit 2 also contains its own controller printed circuit board provided with a CPU and a memory connected to operate the devices of unit 2 under control of a main CPU in terminal control unit 40 (Figure 30).

Figure 3 is an exploded perspective view showing the machine of Figures 1 and 2 in a partially disassembled state. Specifically, one side panel 8 has been moved away from its assembled position and doors 10 and 12 are opened. Therefore, in this view, rear wall 34 of case 4 is visible.

Installed in the lower part of case 4 is the control unit 40 which is constructed in the manner currently used for personal computers to include a motherboard 42, a central processing unit containing a microprocessor, a power supply 44, volatile and non-volatile memories 46, preferably including a non-volatile flash memory whose contents can be altered from a remote supervisory location via a telephone link, and a plurality of cards 48 selected to perform various functions, including communications with the other modules of the machine and with a remotely located central location.

According to one preferred embodiment of the invention, the central processing unit should be at least at the 486 level with a 33 MHz clock, running a version of DOS 6.22. Motherboard 42 carries at least a main memory having a minimum of 4 Mb of Fast Page RAM, with a minimum expansion capability for an additional 32 Mb of memory. The system clock is a real-time clock which is processor controlled and provided with a battery back-up. Motherboard 42 further carries a non-volatile secondary memory having a minimum capacity of 8 Mb. A terminal program, report information and translation logs reside in this memory. The system is capable of being expanded to have at least 80 Mb of memory of this type.

Motherboard 42 further carries, on one or more of cards 48, or directly on board 42, a group of interfaces including two serial ports on one card, at least one parallel port and at least one standard PS/2 style connector and

interface. One of the two serial ports is used to communicate with unit 2, while the other is used to control printer unit 50, to be described below.

The parallel port is provided to communicate with an optional external lister printer. The P/2 connector and interface are provided particularly for optional connection 2 a standard personal computer keyboard.

Cable 18 is hardwired to control unit 40 at a connection point that is preferably located at the bottom of case 4 in a recessed area. This location helps to reduce the risk of tampering or accidentally disconnecting various cables. A first connector panel (not visible) at the rear of case 4 includes at least the following components: an AC input connector; an RJ 11 phone line jack; and an RJ 11 phone jack (pass through). A further connector panel 43 carries the PC keyboard plug (PS/2 type) and possibly other connectors.

Control unit 40 also includes an expansion area that can accommodate a number of additional cards, a manual power cut off switch and an internal modem. The switch is provided to allow manual shut off of the entire machine and is normally left on unless control unit 40 is being serviced. The internal modem may be of the auto answer/auto-dial type with a data transfer speed of at least 14,400 bits per second over voice grade phone lines.

Figure 4 is a perspective view of the machine according to the preferred embodiment of the invention. In this view, the machine is viewed from the top with doors 10 and 12 open to allow the components of printer unit 50 to be viewed. The basic components are a document form storage receptacle, or paper tray, 52, an ink jet printer which includes an essentially flat printer platen 54, and a document form guide system including a guide plate 56 for guiding each one of a plurality of document forms in succession from receptacle 52 to platen 54.

Receptacle 52 is provided with tail-lifting tabs which raise the back end of the stack of document forms to facilitate manual removal of those forms if necessary.

Figure 4 further illustrates that the machine according to the invention is equipped with door open sensors 58. These sensors 58 can be microswitches that are coupled to control unit 40 to halt operation of the machine if door 10 should be opened.

In printer unit 50, paper is transported along a single paper path by a unidirectional friction drive preferably composed of a single set of rollers, including an idle roller 57 (Figure 3) and a drive roller 59 (Figure 4), both of which are located above the document forms as they are fed to the print head.

- 5 In the preferred form of drive, paper does not travel over the wheels or rollers and there is a minimal risk of paper jams. Provision is made for a transport inhibit function which opposes false advance of document forms through the printer. The transport will feed the document forms at a rate of at least 4 inches per second and is constructed to handle documents having a width of
10 up to 6 inches.

Preferably, the document forms are fed in cooperation with printer operation to perform printing with a line pitch of 6 lines per inch over a print zone having a width of the order of 4.5 inches.

- A paper advance button 53 is provided inside case 4. Both a form feed
15 and a line feed mode can be available.

Printer platen 54 forms part of the printer of printer unit 50. The printer includes, as is visible in Figure 3, a print head 62 carried by a carriage 64. Carriage 64 is movable along a support rod 66 in a direction perpendicular to the direction of movement of document forms through the printer.

- 20 Carriage 64 is driven by a conventional mechanism and print head 62 is constructed according to principles well-known in the art. Indeed, the printer can be constituted by a commercially available ink jet printer which is constructed, or can be adapted to be mounted in printer unit 50.

- Prior to being loaded into tray 52, each document form is preprinted
25 with a bar code 82, as shown in Figure 6, that contains a sequence number uniquely identifying that money order form. In a stack introduced into receptacle 52, successive forms will have successive sequence numbers. Each form 70 will further be provided with a conventional "top of form" mark which is formed of optical black ink having a specific reflectivity and position.
30 This mark is located on the back of each document 70, 70', etc. and is therefore not visible in fig. 6.

According to a particular novel feature of the invention, print head 62 carries a bar code reader 63, which may also be of a conventional type, for reading a bar code which was preprinted on each document form or which is

Printer unit 50 further includes a printer controller of a conventional type having stand-alone intelligence and including a CPU that controls real-time printer functions, including sensing the positions of doors 10 and 12. The printer controller may communicate with the main CPU of control unit 40 using a RS-232 C interface, hardware handshaking and a suitable protocol. The program for directing operation of the printer controller will be loaded on an associated flash memory card.

The printer controller may support two or more font sets. Preferably, a first font set includes a complete ASCII character set with at least three international currency symbols. The printer controller must be capable of printing this font set either right side up or upside down. A second desired font set is a custom font having, at the least, numerals, special currency symbols, a custom trademark symbol and a special bar code verify symbol. The characters of the second font set preferably have a height which is four times that of the first font. The characters of the first font set can be printed during one pass of print head 62, while printing of characters of the second set requires 4 passes. Characters of the second font set need be printed only upside down.

Printer unit 50 further includes a rocker switch via which an agent who is responsible for the machine can control power to the machine. This switch controls a sleep mode only and its operation is superseded by an internal power cut-off switch in control unit 40.

Printer unit 50 will normally print with ordinary ink, preferably thermal ink. However, it would also be possible to utilize magnetic ink, which is available for use in ink jet print heads. This would open the possibility of producing financial documents that require characters printed in magnetic ink, starting from totally blank document forms. It would then be possible, by providing suitable software, that can be downloaded to a flash memory in control unit 40 via a telephone link, to generate and dispense different types of documents from the same blank document supply. This will also allow a complete image of the resulting document to be stored electronically. In addition. An ink jet printer will produce a consistent printed product and this will facilitate distinguishing authentic documents from counterfeit documents.

Printer unit 50 further has a separate power supply connection via which power is normally supplied from a power outlet. However, it is conceivable that printer unit 50 could be connected to some other control device, in which case use would be made of an external power adapter.

5 Input unit 2 includes a separate case, or housing, the bottom of which is equipped for mounting unit 2 either on a counter top or on the top surface of door 12.

As noted above, Input unit 2 may include an optional on/off key-operated switch. The on/off state of the switch is detected by an appropriate
10 sensor which is connected to control unit 40 to determine whether operation is to be performed in the executive mode. Reader 30, mounted in the case of unit 2 may be any suitable, commercially available, card reader capable of reading credit, debit, or "smart" cards. One type of reader that is presently contemplated is manufactured by American Magnetics under model
15 designation 171/121.

Figure 5 is a pictorial diagram illustrating various essential components of units 2, 40 and 50. All of the elements shown in Figure 5 have already been described above or are identified by suitable legends.

Figure 6 is a pictorial view of one type of document which can be
20 generated according to the present invention. The document in question is a money order 70 that will be generated starting from a money order form. Initially, a strip of such forms will be introduced into receptacle 52 with successive forms being attached together at tear-off lines 72. The paper will be pre-cut to permit each completed document to be separated, after passing
25 through printer unit 50, from the remaining document forms.

It is presently preferred that each document form consist of two parts: a receipt 74 and a portion 76 that will constitute the actual money order. Alternatively, as illustrated in Figure 6, part 76 may consist of the money order and a stub connected to the money order along a line 78 which is
30 partially pre-cut to permit the money order to be separated from the stub. In addition, the money order is separated from receipt 74 along a further line 80 that is also pre-cut. When each document form consists of only two parts 74, 76, the various lines will be pre-cut to allow the paper to be torn more easily along line 72 than along line 80. If each form is also pre-cut along line 78,

this will be done in such a manner as to allow the paper to be torn along line 78 more easily than along line 80 but less easily than along line 72.

Bar code 82 may be, for example, based on the Code 39 bar code system and consists of at least four sections. The bar code will contain a
5 money order sequence number and one or more check digits for permitting error detection and possibly correction, during bar code reading. Bar code 82 will be associated with a human readable money order sequence number.

When a document form is fed through printer unit 50, the alignment mark is first detected and bar code 82 is read with the aid of bar code reader
10 63 mounted on carriage 64. The information read by bar code reader 63 is transmitted to control unit 40, where the money order sequence number will be compared with that of the money order that was previously prepared and dispensed to assure that there is no break in the money order sequence numbering.

15 As document form 70 is conveyed through printer unit 50, in the transport direction illustrated in Figure 6, a receipt text 84, which is one line high, is printed on receipt portion 74. Then, on the money order document 76, there are printed, in succession, a money text and a money order amount 86, each of which is one line high, and the money amount 88, including a suitable
20 currency symbol. Money amount 88 is preferably printed in the special custom font having a height of several lines, for example four lines. There may then also be printed, either on the money order document or on the stub, if this is provided, a further bar code 90 that contains the associated document sequence number and the money order amount.

25 Bar code 90 will be read by bar code reader 63 as the resulting document exits from the machine. This reading operation will permit verification that the machine software has correctly determined the money order sequence number of the particular form 70 and that printer unit 50 has performed a printing operation; otherwise, bar code 90 would not appear or
30 would be insufficiently dark to be read by bar code reader 63. The money order sequence number contained in bar code 90 may then be compared with the bar code number 82 of the next form 70' to verify that there has been no break in the money order sequence numbers. After bar code 90, it is also

possible to print a message text 92 and a stub text 94, each of which has a height of one line.

Preferably, bar code 82 is located relative to adjacent tear-off line 72 so that when a completed document has been dispensed by being torn off
5 along an associated line 72, the bar code 82 of the following document form will be in line with the reading field of bar code reader 63.

The operation of a machine according to the invention will be controlled, or at least supervised, from a remote location which receives reports from the machine, via a telephone connection, on a periodic basis and
10 issues authorization instructions to allow the machine to continue dispensing documents. Typically, the remote location will be established to monitor and supervise a number of these machines which are installed at different point-of-sale locations. A remote location which can cooperate with a machine according to the present invention can be constituted by a personal computer
15 which is suitably programmed to establish communication with one or more machines, receive and display data from each of those machines and transmit authorization and control instructions back to each machine. The computer at the remote location will be staffed by a human operator who will review the data received from each machine. If that data does not reveal any adverse
20 conditions or inappropriate operation of the machine, the operator will input an authorization command via the computer keyboard and then transmit that command to the individual machine. In this system, other commands can be transmitted from the remote location to a machine to modify the operation of the machine in a desired manner.

25 The operation of a machine according to the invention will now be described with reference to the operation, or programming, flowchart of Figure 7 and with respect to a machine which is configured to issue money orders. However, the machine according to the invention can easily be programmed to issue other types of financial documents, as will be described
30 at a subsequent point herein.

Unless otherwise specified, all of the operations described below are performed under control of software provided in control unit 40.

When the machine is first placed in operation, a number of operations are performed and conditions are detected in startup step 102 of Figure 7.

These include monitoring the states of the door sensor switches and of a key switch to determine whether operation is to be performed in an operator mode or in a executive mode. All hardware, including the printer controller, is initialized and a stored options file and log file are read from flash memory in control unit 40. Essentially, the operator mode is employed to generate and dispense money orders, while the executive mode is employed to perform supervisory and maintenance functions on the machine. Operation in either mode is performed by an individual who is stationed at the machine and who communicates with the machine via input unit 2.

10 If the operator mode is selected, at step 104, the operator is prompted to input a password, which is checked at step 106. If the correct password has been input the system determines whether any actions indicated in the options file, such as generating a report, are to be performed, and performs these actions. The operator can then input a function command, which is detected at 15 step 108. In the example illustrated, these commands can include generating a report in procedure 110, establishing a telephone communication link in procedure 112, generating a money order in procedure 114, or voiding a transaction in procedure 116.

Generation of a money order in procedure 114 will include the 20 following operations. Firstly, in step 120, the operator will collect payment for the money order which includes the face value of the money order and any service charges and will input the amount of the money order and of the transaction fee. If a credit, debit or smart card is being employed to pay for the money order, the operator will input the amount to be charged to the card 25 account, the card will be inserted into the card reader and a telephone connection can be established in order to obtain authorization to charge the amount involved in the transaction to the account represented by the card. At this point, a number of conditions can be checked, including whether the requested money order amount exceeds a preset limit, whether the machine is 30 currently authorized to issue further money orders, whether the previous transaction has been correctly closed and whether there is a document form available in the machine. If the system is operating properly, a document form will be available in the printer unit in a position such that bar code 82 can be read by bar code reader 63. At this time, in step 122, bar code 82 is read and

transaction for each status serial document, and seller of each document dispensed

In procedure 116 to void a transaction, the operator inputs the serial number and the cash value of the money order to be voided in step 140. If the amount inputted is correct for that money order number, then the log is updated in step 142 to indicate that the money order in question is void.

The executive mode, selected in step 160, allows the performance of various functions which cannot be performed by the ordinary operator, these functions including changing the passwords and other options, loading a new supply of money order forms, etc. The executive mode can be selected by inputting an executive key. One who is authorized to enter the executive mode will also have a key to open at least door 12 for loading new money order forms and a key for turning the executive keyswitch on. If the system determines that door 12 is open, but that the executive keyswitch is not on, the system is set to operate in the low level executive mode. If the executive keyswitch is on, the system is set to operate in the high level executive mode. Otherwise, the system will switch into operator mode.

When switched into either executive mode, the system performs a routine to determine if any selected events are to occur and, if so, executes those events.

Certain executive commands, or procedures, are only permitted in the high level executive mode. These are determined by options that are stored in the flash memory and can be changed by commands inputted in the high level executive mode or commands downloaded from the remote location.

If the machine is in the executive mode and the load blank money orders procedure 174 is selected, the machine interrogates the operator to determine what is to be done with any blank forms that have not been used. Then, in step 180, the operator inputs the serial numbers and the size of the new stack of forms to be loaded and, in step 182, updates the transaction log with this information. At this time, in addition, bar code reader 63 associated with the printer can read the bar code on the first form to verify that the sequence number information inputted by the operator is correct.

In the phone out procedure 172, a telephone connection will be established with the remote location in step 190. After that connection has

been established, the contents of the transaction log will be uploaded to the remote location in step 192 and any changes to be made to the machine are downloaded in step 194. These changes can include enabling or disabling agent pass codes resetting current time and date, resetting a fee table, etc.

5 Then, in step 196, the log is updated.

In report procedure 170, the following reports can be printed, as well as others. A current daily report, a previous daily report, a document list, a machine set up report, a report deleting the oldest day, the oldest day being the earliest day for which data is currently stored, and a report of the current

10 display version.

This is performed in step 200, in which it is also possible to set, by inputting via input unit 2, various report options, including selection of the desired device to which reports are to be printed, to which messages are to be printed and to which an audit trail is to be printed. After all selections have been

15 made, the selected report is printed in step 202.

In procedure 176, a variety of options can be set or reset, based on information input by the agent via input unit 2 in step 204. Options that can be modified in step 204 include: selection of which executive functions require an executive key; setting of agent timeout; enabling or disabling of a

20 lockout period based on the inputting of a begin time and an end time; calculate change options, such as change the calculation required and change the key required to reset the display; communication options, including: comm. password; baud rate selection; modem dialing mode (tone or pulse); primary telephone number and secondary telephone number; document

25 options, such as whether or not to print a stub, reset options, including resetting the document memory and resetting all of the memory; special function options, including machine number, which is the number assigned to each machine at a particular location, agent number and terminal serial number, which is assigned at the time of manufacture; remote location, or

30 host, communication options, such as redial time, number of redial tries, response time and command time; and diagnostic options including whether to test the list printer, and/or the main printer, and/or bar code reader 63; and/or communication components. After any desired option changes have been

made, the file or files in which these options are stored are updated in step 206.

Maintenance procedure 178 includes, in step 208, performing any hardware diagnostic operations that have been preselected as diagnostics

5 options.

There are other options that can also be changed, but preferably only from the remote location via an established telephone link. These include setting of the commissions, or fees, that can be charged at the sale location, as well as the following options:

10 Report options: Op. Daily to close; Auto-Dly Close Out; Auto-Daily Time, Cumulative summary,

Communication options: Enable Communications,

Document Options: Maximum Doc. Amount; Maximum Pack Size; String to print on stub,

15 Void Authority options: Void Authority (Any Untransmitted, Current day); MaxAutomatic Void; Max Manual Void,

Security Values: Modify System Vars; Security Lock; MaxDays without Poll; MaxItems Per Day; MaxAmount Per Day,

Currency: Which of the three currency symbols to use.

20 Set Up Report Options: Baud Rate; Flow Control; Control Line; Timeout; End of Line; Select Rpt. Char/Inch; Lister Rpt. Contents; Lister Rpt. Lines; Cir Acc After Sumry; Print Auto-Dly Rpt; If Lister Time-out; Auto-Dly Rpt Copies; Close out Sunday . . . Saturday; Void on Report

When a communication link is established, the operator at the remote
25 location can also transmit instructions to change which executive functions require an executive key. However, this operation is not performed exclusively under control of the remote location, but can also be performed by an individual authorized to operate the machine in the executive mode.

In addition to the above, the following options can be provided if
30 desired.

Communication options: Mode; Password for Host; Modem Standard; Enable Auto-Dial; Auto-Dial Begin Time; Auto-Dial End Time; Dial Sunday...Saturday,

Document options: MaxVendor Payment; Packet Termination;
Document Length; Stub format; SN Check; Print Courtesy Amount; Print
Void Over; SN Sequencing; Sequence Check Digit,

Void Authority options: Jam Auto Void,

5 Special Function options: Document Print Fmt; Comm Report Fmt;
Store Number; Chain Number; Dial out. Digits,

Security Value options: Recheck items; Recheck Amount,

Host Comm Setup options: User ID.

The normal process for printing a money order is as follows:

10 read the bar code,
verify it is the next expected in sequence,
print the money order, receipt, and stub,
print a machine readable mark/bar code,
verify the mark is readable (verifies ink is on the paper),
15 move the next money order into position, and
verify that the sequence number on the next money order is the
next expected number (verifies paper has moved).

If the bar code cannot be read, the machine will prompt the agent, print
a void money order, and ask the agent for the serial number on the voided
20 document. The machine will then proceed in "softfail" mode, printing without
verifying as long as the printer door remains closed and the power remains on.

If the serial number (either read or entered) is not the next expected
number but has advanced by less than 10 numbers, the machine will
automatically log the missing documents as void.

25 If the ink test fails, the machine will ask the agent if the document is
readable and log it as void if it is not readable.

When daily closing is effectuated, a Daily Summary report is
scheduled to be printed as soon as a printer is available. Also, a closing
communication is scheduled to be sent to the system as soon as the phone is
30 available. A daily closing may only be performed once per calendar day. Any
sales after closing go onto the next day's sales. Accumulators for daily limits
are also reset at this time.

Daily closing may also be done manually by running the Daily
Summary Report (if Op. Daily to Close is true). If it has not been performed

manually by the auto close time (Auto Dial Begin Time) it will be performed automatically. If, when a machine is switched on, it detects the auto close time has passed, a close will be performed as if it were that previous day.

5 The machine will have the ability to store information for at least 2,500 documents.

There are two daily security limits: maximum number of items, or transactions, (MaxItems) per day and maximum total cash value of transactions (MaxAmount) per day. The machine will not interrupt a current customer; that is, if an agent is below all security limits before the start of that
10 customer's transaction and that transaction causes the agent to pass a limit, the current customer transaction will be completed and then the machine will sell no more until it has communicated by phone with the central, or remote, system and received authorization to proceed.

Voided documents count toward the daily limit.

15 The security limit MaxDays Without Poll is enforced at closing.

Printing of a stub can be turned on or off. The stub format is fixed, but it includes a string which is sent from the system and that string can be set by the system any time it is connected by phone.

While there has been provided a detailed description of the operations
20 involved in printing a money order, one significant advantage of the machine according to invention is that it can be easily programmed to dispense other types of documents. For example, by simple software modifications and the provision of a different type of document form, the machine can be configured to handle charge and debit transactions. For example, a credit, debit, or smart
25 card may be inserted into reader 30 and the amount of a transaction can be keyed into unit 2. Then, optionally, keyboard 24 of unit 2 can be employed to dial out to an authorizing location, or such dialing out can be controlled automatically by the program. When authorization to accept the charge has been received via the telephone connection, a credit card transaction receipt
30 can then be printed out by printer unit 50.

Similarly, bill payments can be made, by use of a credit, debit, or smart card, or by transferring cash to an agent, who then uses key pad 24 to input identification of the payee, the amount paid and the phone number of the

financial institution to which payment is to be transferred. Here again, printer unit 50 is used to print out a receipt.

In addition, a machine according to the invention can be used to effect wire transfers or to generate phone cards, ID cards, gift certificates, or
5 travelers checks. Other types of financial transactions will become apparent to those skilled in the art.

According to a further feature of the invention, if the machine should be disconnected from its power source and subsequently reconnected, the control system can be configured to report the disconnection of the machine to
10 the remote supervisory location and to prevent further transactions until a new authorization has been received from the remote supervisory location

While the description above refers to particular embodiments of the present invention, it will be understood that many modifications may be made without departing from the spirit thereof. The accompanying claims are
15 intended to cover such modifications as would fall within the true scope and spirit of the present invention.

The presently disclosed embodiments are therefore to be considered in all respects as illustrative and not restrictive, the scope of the invention being indicated by the appended claims, rather than the foregoing description, and
20 all changes which come within the meaning and range of equivalency of the claims are therefore intended to be embraced therein.

CLAIMS

What is claimed is:

- 5 1. A machine for preparing and dispensing documents relating to financial transactions, said machine comprising:
- a manually operable input unit for input of data and operating commands;
- a document printer unit for printing readable information on document forms based on data inputted at said input unit, said document printer unit comprising
- 10 a document form storage receptacle for holding the document forms prior to being printed,
- an ink jet printer for printing the readable information on the documents to produce completed documents, and
- 15 a feed mechanism for feeding the document forms in succession from said receptacle to said printer and for dispensing printed documents from said machine after having been printed by said printer; and
- 20 a control unit coupled to said input unit and said printer unit for controlling operation of said printer unit in response to data and commands inputted at said input unit.
- 25 2. The machine according to claim 1 wherein each document form carries a bar code, and said machine further comprises an optical reader in said printer unit for reading the bar code on each document form.

3. The machine according to claim 2 wherein:

said feed mechanism is operative to feed document forms in succession in a feed direction through said printer;

said printer comprises a print head for dispensing ink to form the

5 printed information on the document forms;

said print head is mounted in said printer for movement in a scanning direction while dispensing the ink;

the scanning direction is transverse to the feed direction; and

said optical reader is mounted for movement with said print head.

10

4. The machine according to claim 3 wherein said printer contains a supply of magnetic ink to be dispensed by said print head.

5. The machine according to claim 3 wherein said optical reader is
15 coupled to said control unit for supplying to said control unit data obtained from reading bar code patterns printed on the document forms.

6. The machine according to claim 1 wherein said feed
mechanism is constructed and operative for feeding the document forms in a
20 single direction from said storage receptacle through said printer and from said machine.

7. The machine according to claim 1 wherein said control unit
comprises a program-controlled data processing device.

25

8. The machine according to claim 7 wherein said data processing device comprises:

a central processing unit containing a microprocessor operable in response to program instructions;

30 input/output means connected for receiving the data and operating commands inputted at said input unit and for supplying data and control signals to said printer unit; and

memory means for storing the program instructions for said microprocessor and for receiving and storing data received by said input/output means.

5 9. The machine according to claim 8 in combination with a plurality of the document forms held in said receptacle, and wherein each of the document forms is a preprinted form provided with information uniquely identifying that document.

10 10. The machine according to claim 9 wherein the information uniquely identifying each document is in the form of a bar code, and said machine further comprises an optical reader disposed for reading the bar code on each document and having an output coupled to said input/output means for supplying data uniquely identifying each document.

15 11. The machine according to claim 10 wherein each document is printed to have a monetary value determined by the data inputted at said input device, and said central processing unit is operative to store in said memory means data received by said input/output means from said input device and
20 representing the monetary value of each document, together with data received by said input/output means from said optical reader for the same document.

 12. The machine according to claim 8 in combination with a plurality of the document forms held in said receptacle, and wherein each of
25 said document forms is a blank form and said printer contains a supply of magnetic ink to be dispensed by said print head.

 13. The machine according to claim 1 wherein said input device comprises a data reader for reading data stored in machine readable form on a
30 data storage medium.

14. The machine according to claim 1 wherein:

each document is printed to have a monetary value determined by the data inputted at said input device;

said machine further comprises a memory connected for storing data
5 representing the monetary value of each document and data representing the cumulative monetary value of a succession of documents; and

said machine further comprises a communication interface coupled to said memory for transmitting the data stored in said memory to a central location remote from said machine.

10

15. The machine according to claim 14 wherein said control unit is operative to receive authorization instructions from the central location via said interface and to block dispensing of printed documents when the cumulative monetary value exceeds a predetermined value and an
15 authorization instruction to dispense further printed documents has not been received by said control unit.

16. The machine according to claim 15 further comprising a time keeping device, and wherein said control device is operative under control of
20 said time keeping device for blocking dispensing of printed documents when no transmission of the data stored in said memory to the central station has occurred for a predetermined period of time.

17. The machine according to claim 15 further comprising a time
25 keeping device, and wherein said control device is operative under control of said time keeping device for blocking dispensing of printed documents when reception of an authorization instruction from the central station has not occurred for a predetermined period of time.

30 18. The machine according to claim 1 further comprising: a communication interface for conducting communications with a central location remote from said machine; and a time keeping device, and wherein said control unit is operative to receive authorization instructions from the central location via said interface, and said control device is operative under

control of said time keeping device for blocking dispensing of printed documents when reception of an authorization instruction from the central station has not occurred for a predetermined period of time.

- 5 19. A machine for preparing and dispensing documents relating to financial transactions, said machine comprising:
- a manually operable input unit for input of data and operating commands;
 - a document printer unit for printing readable information on document
- 10 forms based on data inputted at said input unit, said document printer unit comprising
- a document form storage receptacle for holding the document forms prior to being printed,
 - a printer for printing the readable information on the documents
- 15 to produce completed documents, and
- a feed mechanism for feeding the document forms in succession from said receptacle to said printer and for dispensing printed documents from said machine after having been printed by said printer; and
- 20 a control unit coupled to said input unit and said printer unit for controlling operation of said printer unit in response to data and commands inputted at said input unit,
- 25 wherein each document form carries a bar code, and said machine further comprises an optical reader in said printer unit for reading the bar code on each document form.

wherein said printer contains a supply of magnetic ink with which the readable information is printed on the document forms.

23. A machine for preparing and dispensing documents relating to financial transactions, said machine comprising:
- a manually operable input unit for input of data and operating commands;
 - a document printer unit for printing readable information on document forms based on data inputted at said input unit, said document printer unit comprising
 - a document form storage receptacle for holding the document forms prior to being printed,
 - a printer for printing the readable information on the documents to produce completed documents, and
 - a feed mechanism for feeding the document forms in succession from said receptacle to said printer and for dispensing printed documents from said machine after having been printed by said printer; and
 - a control unit coupled to said input unit and said printer unit for controlling operation of said printer unit in response to data and commands inputted at said input unit,
- wherein said control unit comprises a program-controlled data processing device.

24. The machine according to claim 23 wherein said data processing device comprises:
- a central processing unit containing a microprocessor operable in response to program instructions;
 - input/output means connected for receiving the data and operating commands inputted at said input unit and for supplying data and control signals to said printer unit; and
 - memory means for storing the program instructions for said microprocessor and for receiving and storing data received by said input/output means.

25. The machine according to claim 24 in combination with a plurality of the document forms held in said receptacle, and wherein each of the document forms is a preprinted form provided with information uniquely
5 identifying that document.

26. The machine according to claim 25 wherein the information uniquely identifying each document is in the form of a bar code, and said machine further comprises an optical reader disposed for reading the bar code
10 on each document and having an output coupled to said input/output means for supplying data uniquely identifying each document.

27. The machine according to claim 26 wherein each document is printed to have a monetary value determined by the data inputted at said input
15 device, and said central processing unit is operative to store in said memory means data received by said input/output means from said input device and representing the monetary value of each document, together with data received by said input/output means from said optical reader for the same document.

20 28. The machine according to claim 24 in combination with a plurality of the document forms held in said receptacle, and wherein each of said document forms is a blank form and said printer contains a supply of magnetic ink to be dispensed by said print head.

29. A machine for preparing and dispensing documents relating to financial transactions, said machine comprising:

a manually operable input unit for input of data and operating commands;

5 a document printer unit for printing readable information on document forms based on data inputted at said input unit, said document printer unit comprising

a document form storage receptacle for holding the document forms prior to being printed,

10 a printer for printing the readable information on the documents to produce completed documents, and

a feed mechanism for feeding the document forms in succession from said receptacle to said printer and for dispensing printed documents from said machine after having been printed by said printer; and

15 a control unit coupled to said input unit and said printer unit for controlling operation of said printer unit in response to data and commands inputted at said input unit,

wherein said input device comprises a data reader for reading data stored in machine readable form on a data storage medium.

30. A machine for preparing and dispensing documents relating to financial transactions, said machine comprising:

25 a manually operable input unit for input of data and operating commands;

a document printer unit for printing readable information on document forms based on data inputted at said input unit, said document printer unit comprising

30 a document form storage receptacle for holding the document forms prior to being printed,

a printer for printing the readable information on the documents to produce completed documents, and

a feed mechanism for feeding the document forms in succession from said receptacle to said printer and for dispensing

printed documents from said machine after having been printed by said printer; and

a control unit coupled to said input unit and said printer unit for controlling operation of said printer unit in response to data and commands

5 inputted at said input unit, wherein:

each document is printed to have a monetary value determined by the data inputted at said input device;

said machine further comprises a memory connected for storing data representing the monetary value of each document and data representing the
10 cumulative monetary value of a succession of documents; and

said machine further comprises a communication interface coupled to said memory for transmitting the data stored in said memory to a central location remote from said machine.

15 31. The machine according to claim 30 wherein said control unit is operative to receive authorization instructions from the central location via said interface and to block dispensing of printed documents when the cumulative monetary value exceeds a predetermined value and an authorization instruction to dispense further printed documents has not been
20 received by said control unit.

32. The machine according to claim 31 further comprising a time keeping device, and wherein said control device is operative under control of said time keeping device for blocking dispensing of printed documents when
25 no transmission of the data stored in said memory to the central station has occurred for a predetermined period of time.

33. The machine according to claim 31 further comprising a time keeping device, and wherein said control device is operative under control of
30 said time keeping device for blocking dispensing of printed documents when reception of an authorization instruction from the central station has not occurred for a predetermined period of time.

34. A machine for preparing and dispensing documents relating to financial transactions, said machine comprising:

a manually operable input unit for input of data and operating commands;

5 a document printer unit for printing readable information on document forms based on data inputted at said input unit, said document printer unit comprising

a document form storage receptacle for holding the document forms prior to being printed,

10 a printer for printing the readable information on the documents to produce completed documents, and

a feed mechanism for feeding the document forms in succession from said receptacle to said printer and for dispensing printed documents from said machine after having been printed by said printer;

15 a control unit coupled to said input unit and said printer unit for controlling operation of said printer unit in response to data and commands inputted at said input unit;

a communication interface for conducting communications with a central location remote from said machine; and

20 a time keeping device, and wherein
said control unit is operative to receive authorization instructions from the central location via said interface, and said control device is operative under control of said time keeping device for blocking dispensing of printed
25 documents when reception of an authorization instruction from the central station has not occurred for a predetermined period of time.

35. A method for preparing and dispensing documents relating to financial transactions, said method comprising:

inputting data and operating commands via a manually operable input unit;

5 providing a plurality of document forms each printed with a bar code;
feeding a succession of document forms from a document form storage receptacle to a document printer and printing readable information on each successive document form based on data inputted at the input unit;

reading the bar code on each document form with an optical reader
10 when the form is in the printer; and
dispensing each form, after printing, from the document printer.

36. A method for preparing and dispensing documents relating to financial transactions, said method comprising:

15 inputting data and operating commands via a manually operable input unit;
feeding a succession of document forms from a document form storage receptacle to a document printer;

printing on each successive document form, in the printer with
20 magnetic ink, readable information based on data inputted at the input unit;
and

dispensing each form, after printing, from the document printer.

37. A method for preparing and dispensing documents relating to financial transactions, said method comprising:

25 inputting data and operating commands via a manually operable input unit;

reading data stored in machine readable form on a data storage medium in a data reader forming part of the manually operable input unit;

30 feeding a succession of document forms from a document form storage receptacle to a document printer and printing readable information on each successive document form based on data inputted at the input unit and data read in the data reader; and

dispensing each form, after printing, from the document printer.

38. A method for preparing and dispensing documents relating to financial transactions, said method comprising:

inputting data and operating commands via a manually operable input unit;

5 feeding a succession of document forms from a document form storage receptacle to a document printer and printing readable information on each successive document form, the readable information assigning a monetary value to the document form based on data inputted at the input unit;

dispensing each form, after printing, from the document printer;

10 storing data representing the monetary value of each document and data representing the cumulative monetary value of a succession of documents in a memory;

establishing communication between a remote location and a communication interface coupled to the memory, and transmitting the data
15 stored in the memory to the remote location.

39. A method for preparing and dispensing documents relating to financial transactions, said method comprising:

inputting data and operating commands via a manually operable input
20 unit;

feeding a succession of document forms from a document form storage receptacle to a document printer and printing readable information on each successive document form based on data inputted at the input unit;

dispensing each form, after printing, from the document printer

25 establishing communication between a remote location and a communication interface;

periodically transmitting authorization instructions from the remote location to the communication interface; and

blocking dispensing of printed documents when reception of an
30 authorization instruction from the remote location has not occurred for a predetermined period of time.

ABSTRACT OF THE DISCLOSURE

A method and machine for preparing and dispensing documents relating to financial transactions. The machine contains an ink jet printer for printing the documents and a bar code reader mounted for movement with the
5 print head of the printer for reading bar codes on each document before or during printing. The machine includes a control unit having personal computer architecture including a CPU, memories and input/output devices. One of the devices is a modem allowing communication with a remote supervisory
10 location. Operation of the machine is controlled from the remote supervisory location, which provides periodic authorization to continue to prepare and dispense documents in response to transaction reports transmitted from the machine to the remote supervisory location. A wide variety of documents can be prepared and dispensed under control of software in the control unit.



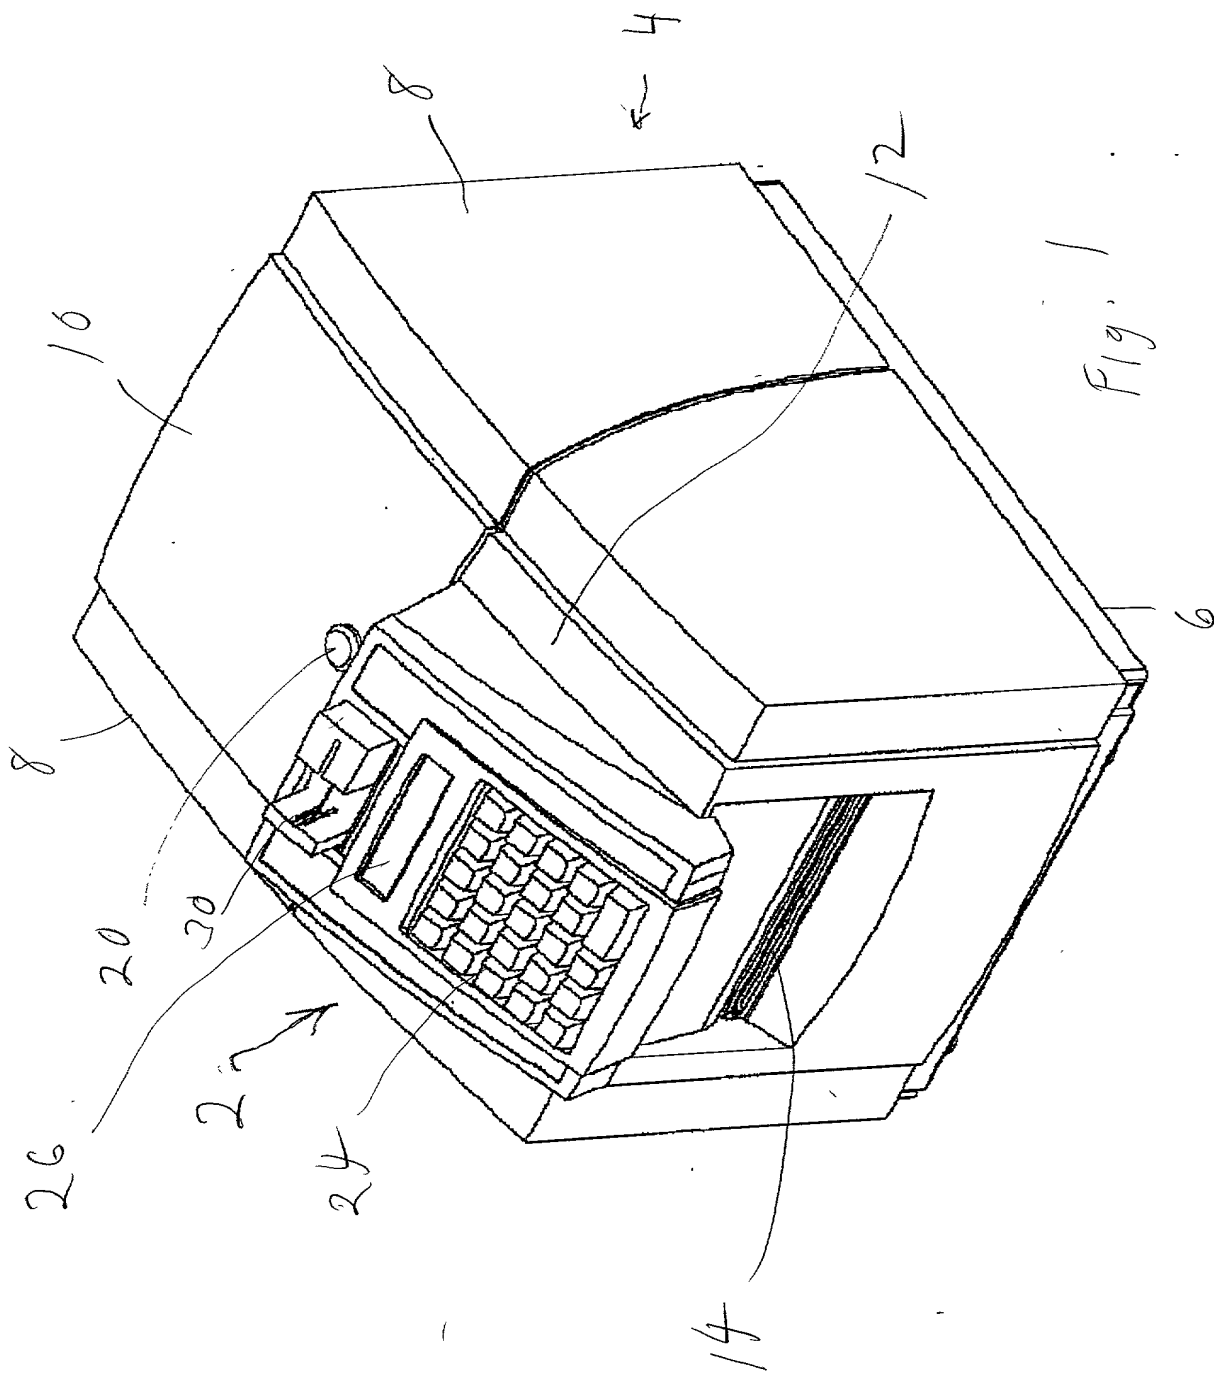


Fig. 1

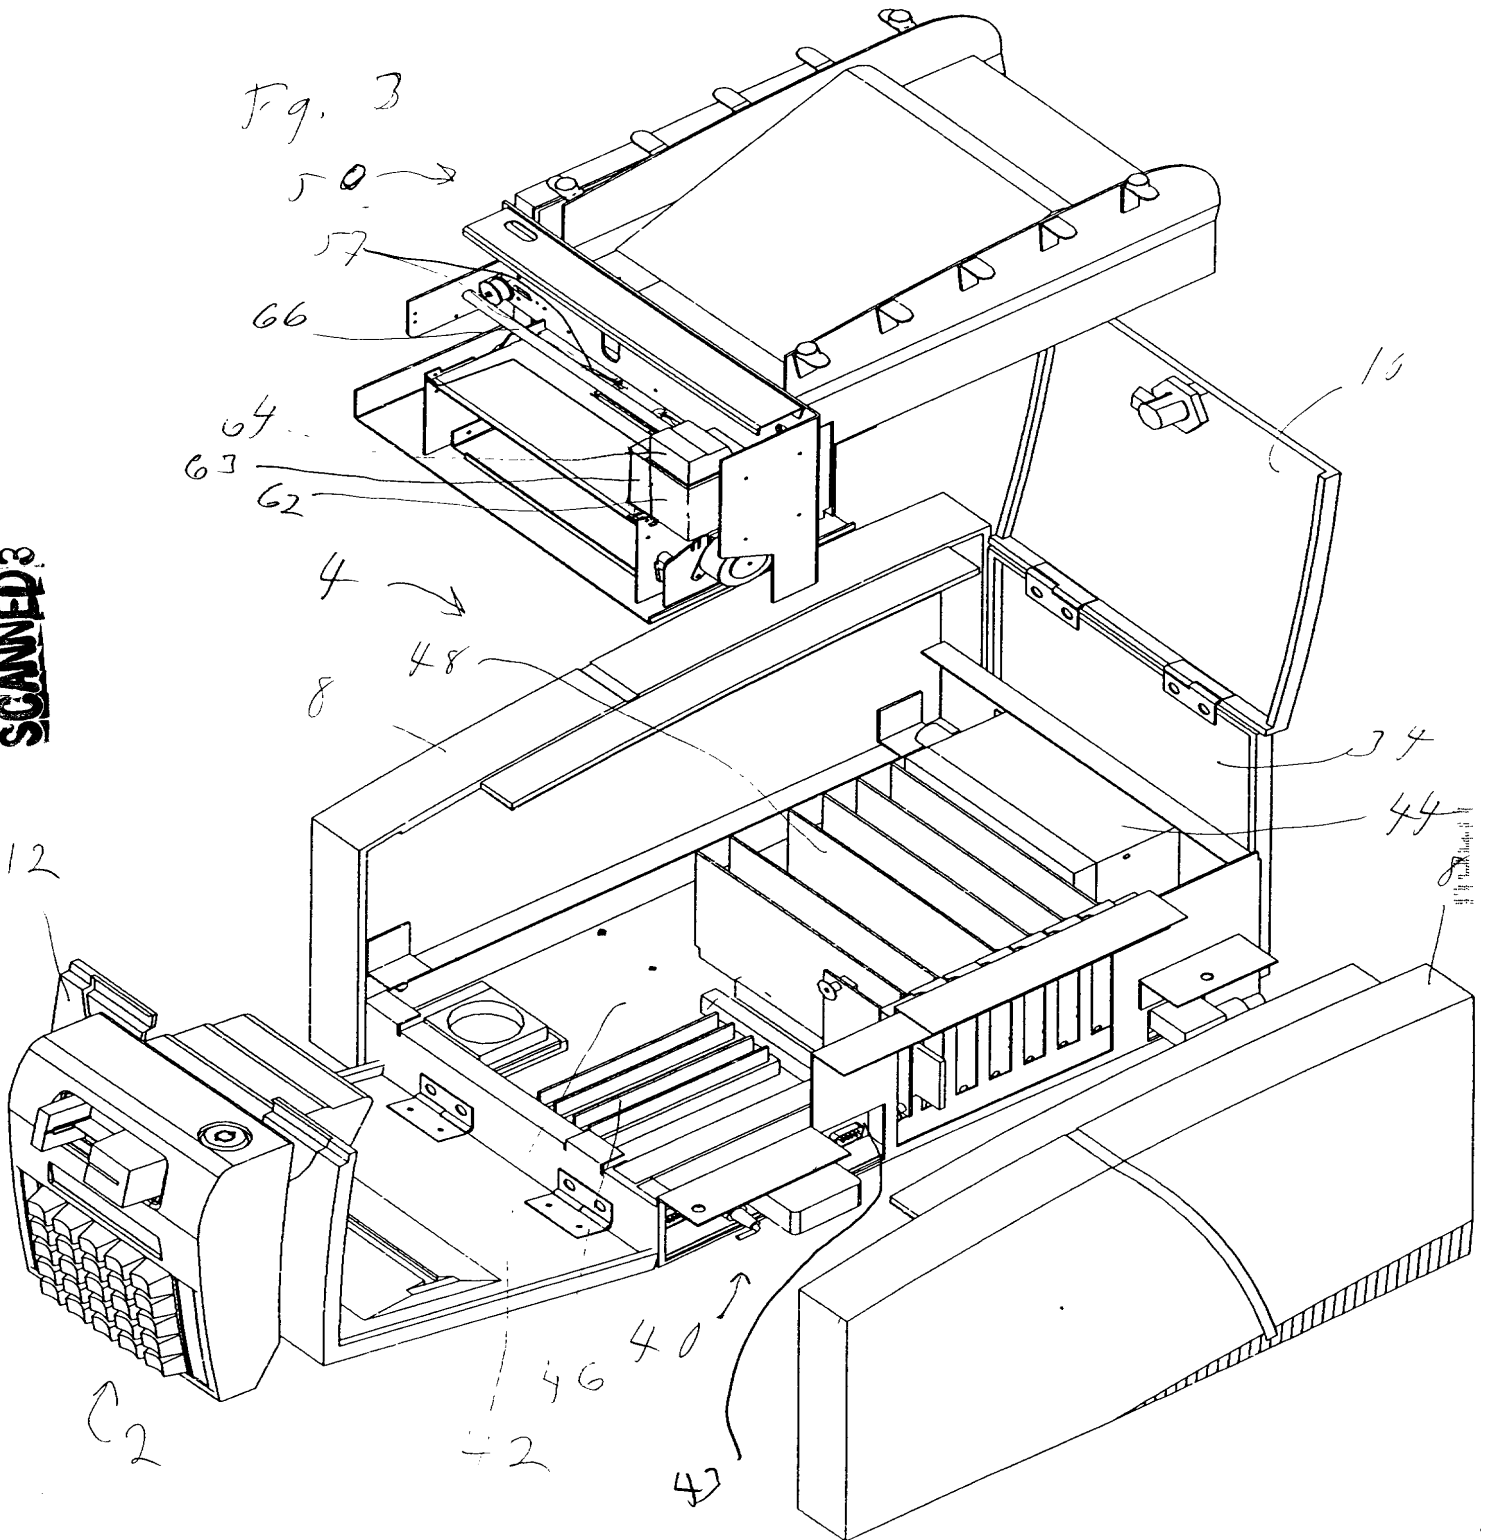

SCANNED 3

Fig. 3





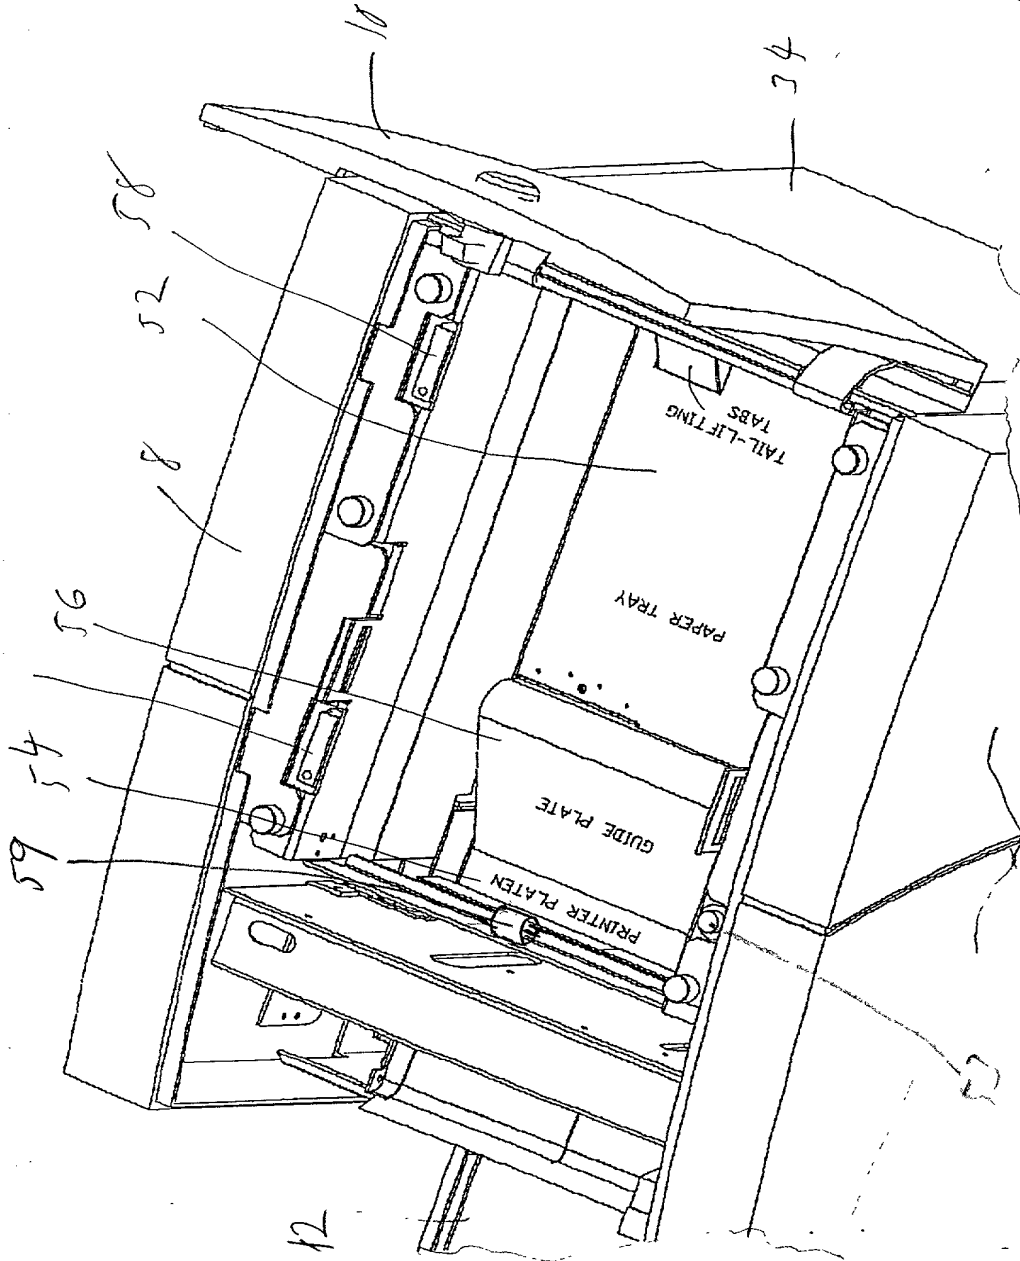


Fig. 4

Fig. 5

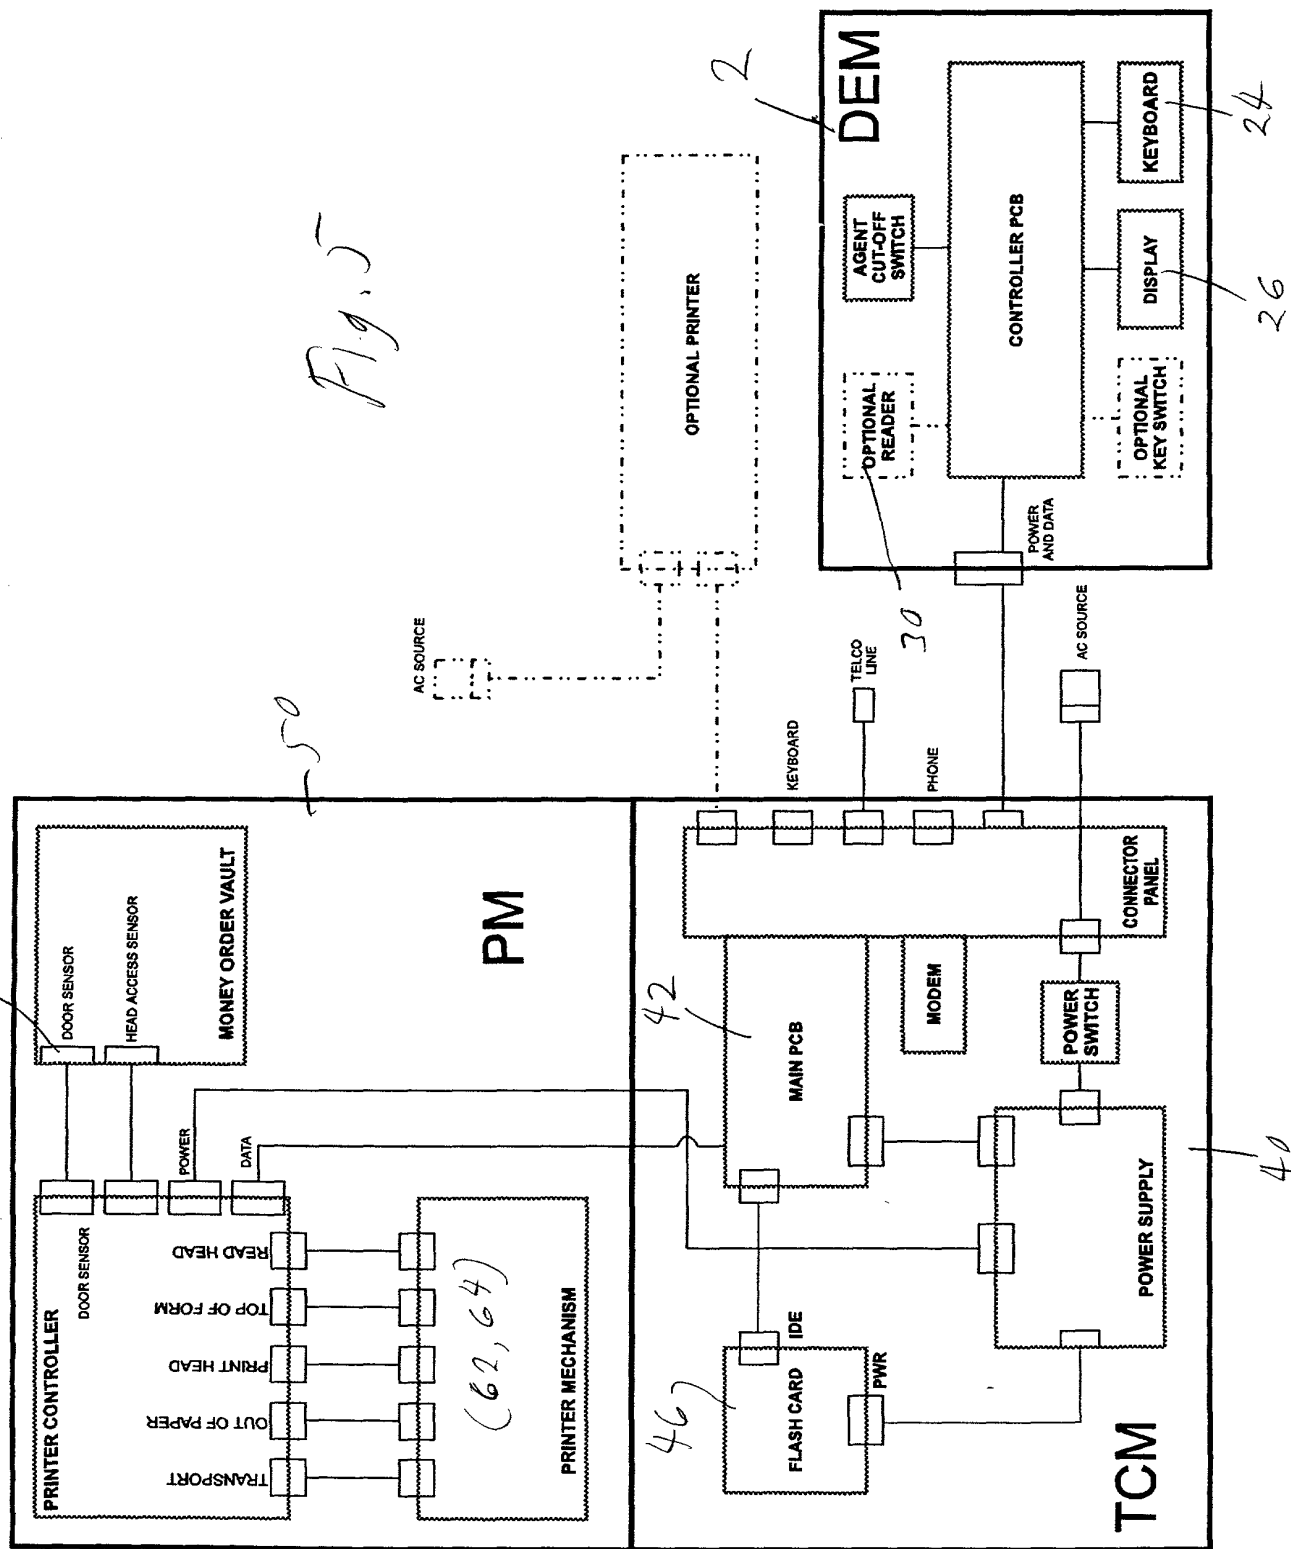

66260-7587060

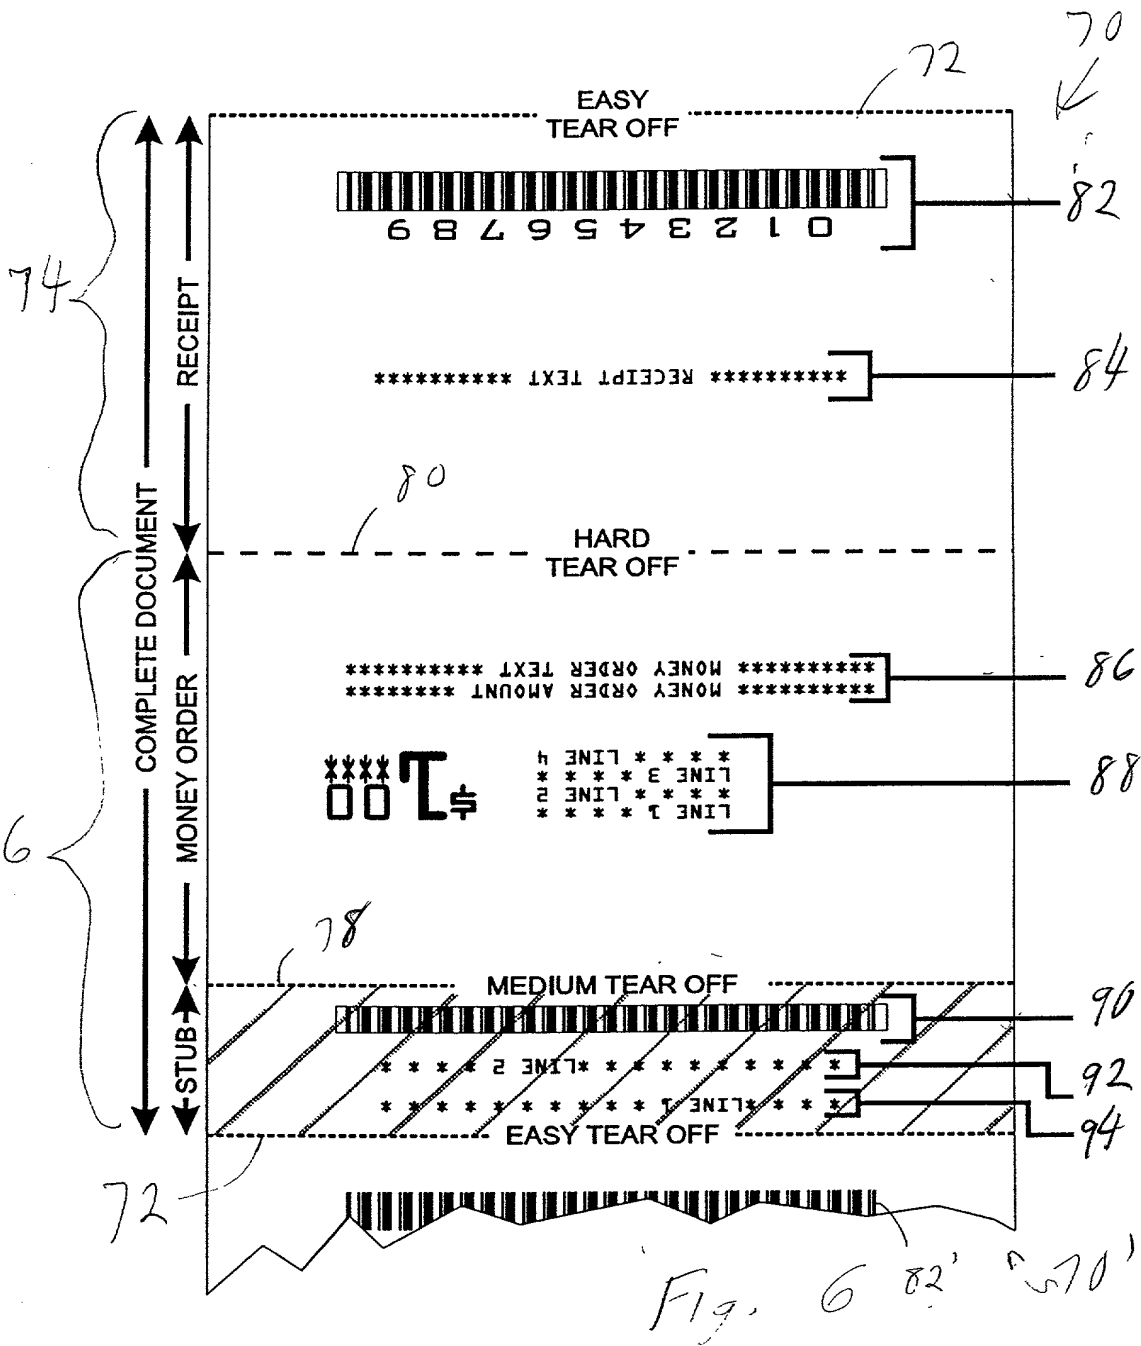

Sense printer door open or exec key to switch between exec and operator mode

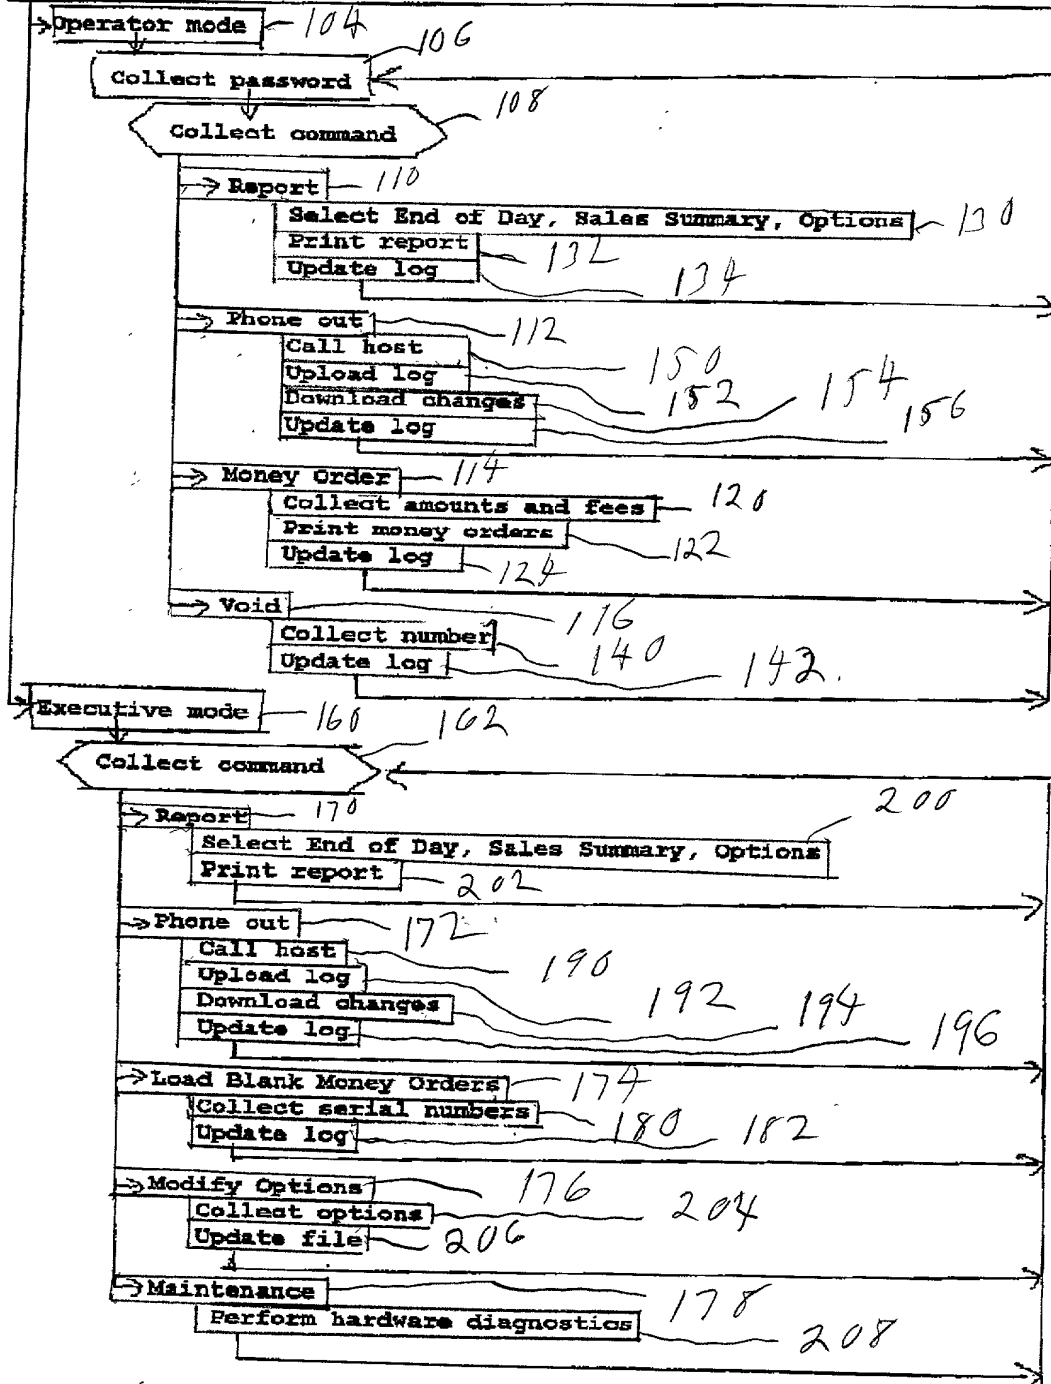


Fig. 7